
FRONT ELEVATION (EXTERNAL VIEW)

SCALE 1:40

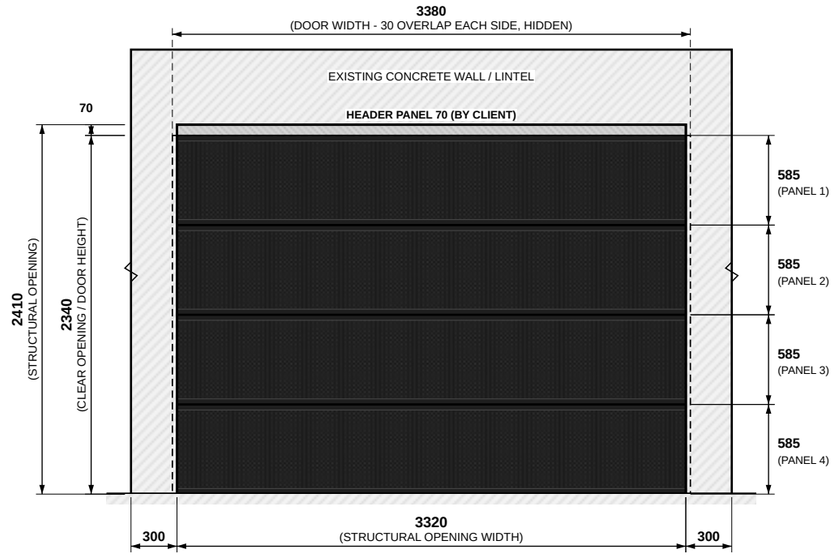


PLAN VIEW (LOOKING UP TO CEILING)


SCALE 1:40 - SERVICES OMITTED FOR CLARITY

SIDE SECTION (THROUGH OPENING)

SCALE 1:25

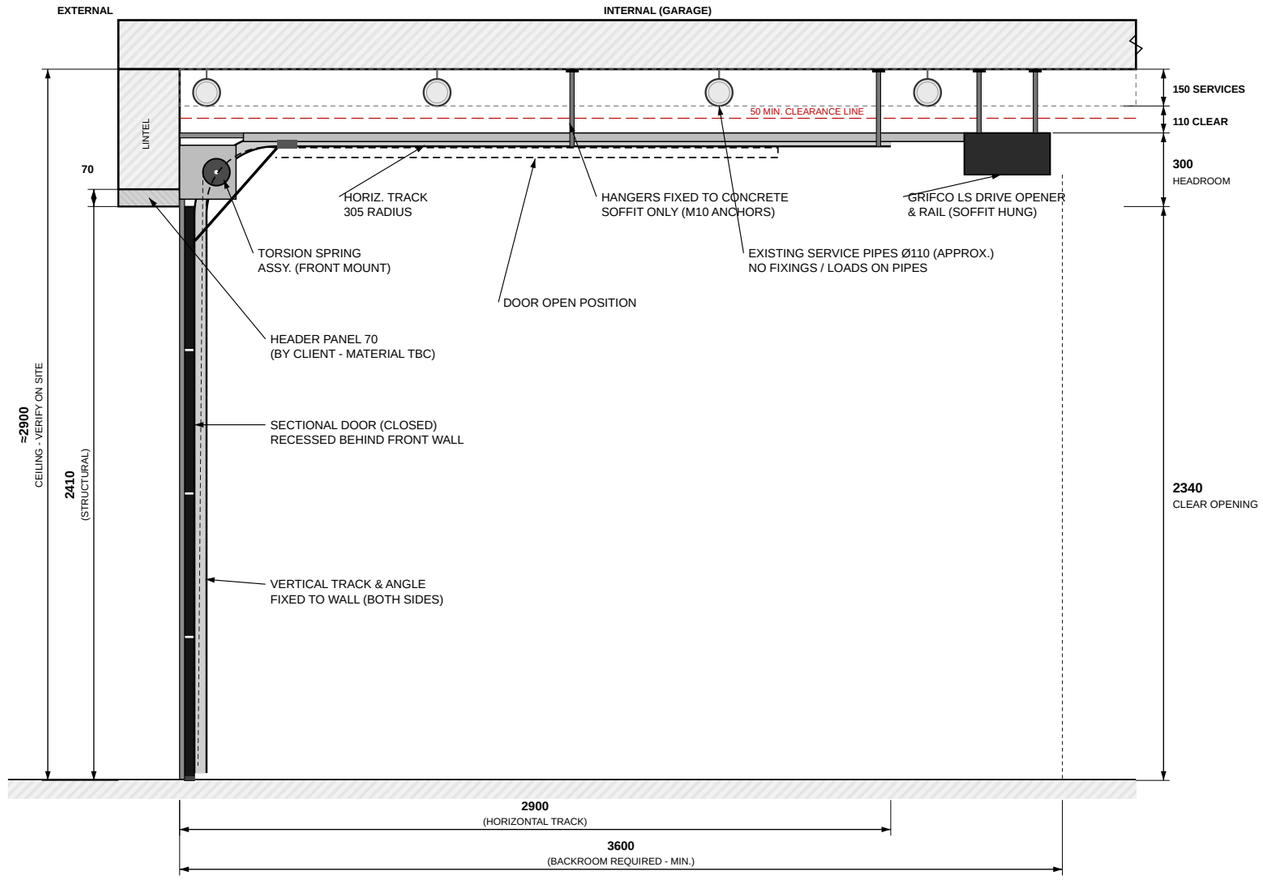

PERFORATION DETAIL (SCALE 1:1)

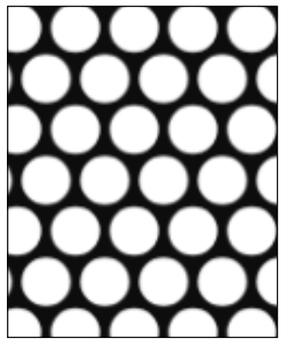

PERFTECH P7995 - ROUND HOLE (60° STAGGERED)

Hole Diameter:	7.95 mm
Pitch:	9.53 mm
Open Area:	62% (nominal)
Finish:	Black powder coat
Panels:	4 x 585 mm

HEIGHT & CLEARANCE SCHEDULE

ITEM	LEVEL / DIM.	REMARK
Concrete soffit (ceiling)	**≈ 2900 AFL**	VERIFY ON SITE
Underside of service pipes	**≈ 2750 AFL**	VERIFY ON SITE
Top of track / opener rail	**2640 AFL**	
Underside of lintel	**2410 AFL**	STRUCTURAL
Underside of header panel	**2340 AFL**	CLEAR OPENING
Track / opener to pipes	**110**	50 MIN.
Headroom (opening to track top)	**300**	MIN. REQUIRED
Side room (door edge to side wall)	**270**	EACH SIDE
Backroom (wall to rear of opener)	**3600**	MIN. REQUIRED

SPECIFICATIONS

Door Type:	Sectional Garage Door (Perforated Panels)
Structural Opening:	3,320 W x 2,410 H mm
Header Panel:	70 mm (by client, material TBC)
Clear Opening:	3,320 W x 2,340 H mm
Door Size:	3,380 W x 2,340 H mm
Overlap / Side Room:	30 mm each side / 270 mm each side
Panels:	4 No. x 585 mm high
Track:	Standard lift, 305 mm radius
Colour / Finish:	Black (powder coat)

MOTOR

Model:	Grifco LS Drive
Location:	Ceiling mounted, rear centre
Support:	Hangers to concrete soffit
	(no fixing to services)
Clearance:	110 mm to pipes (50 min.)
Power Supply:	GPO at ceiling (by others)
Electrician:	TBD (confirm with supplier)

NOTES

1. All dimensions in millimetres (mm). Do not scale - use figured dimensions.
2. Door installed on internal face of front wall (recessed), 30 mm overlap each jamb.
3. Header panel (70 mm) supplied & installed by client prior to door installation.
4. Ceiling height and pipe positions are approximate - verify on site before fabrication.
5. All hangers & opener brackets fixed to concrete soffit ONLY. No fixings to, or loads on, pipes.
6. Maintain min. 50 mm clearance between moving parts and existing services.
7. Check pipe drop at internal RH corner (viewed from inside) clear of track & flag bracket.
8. Perforated panels: Perftech P7995, black powder coat, interior & exterior.
9. Drawing for builder coordination. Final details to be confirmed by door manufacturer.

PROJECT:	**GARAGE DOOR SHOP DRAWING**
ADDRESS:	**118 Glass St, Essendon VIC 3040**
JOB No.:	207904
DATE:	05 NOVEMBER 2026
SCALE:	AS SHOWN @ A3
REVISION:	F - REDRAWN TO SITE OPENING
DRAWING No.:	**GD-01 SHEET: 1 OF 1**